


ROYAL
STATUARIO
NEW



Specifications	Polished	Matt
Water Absorption	< 0.05%	< 0.1%
Scratch Hardness (Mohs)	8	9
Shade Variation	V1	V1
DCOF	< 0.4	> 0.4

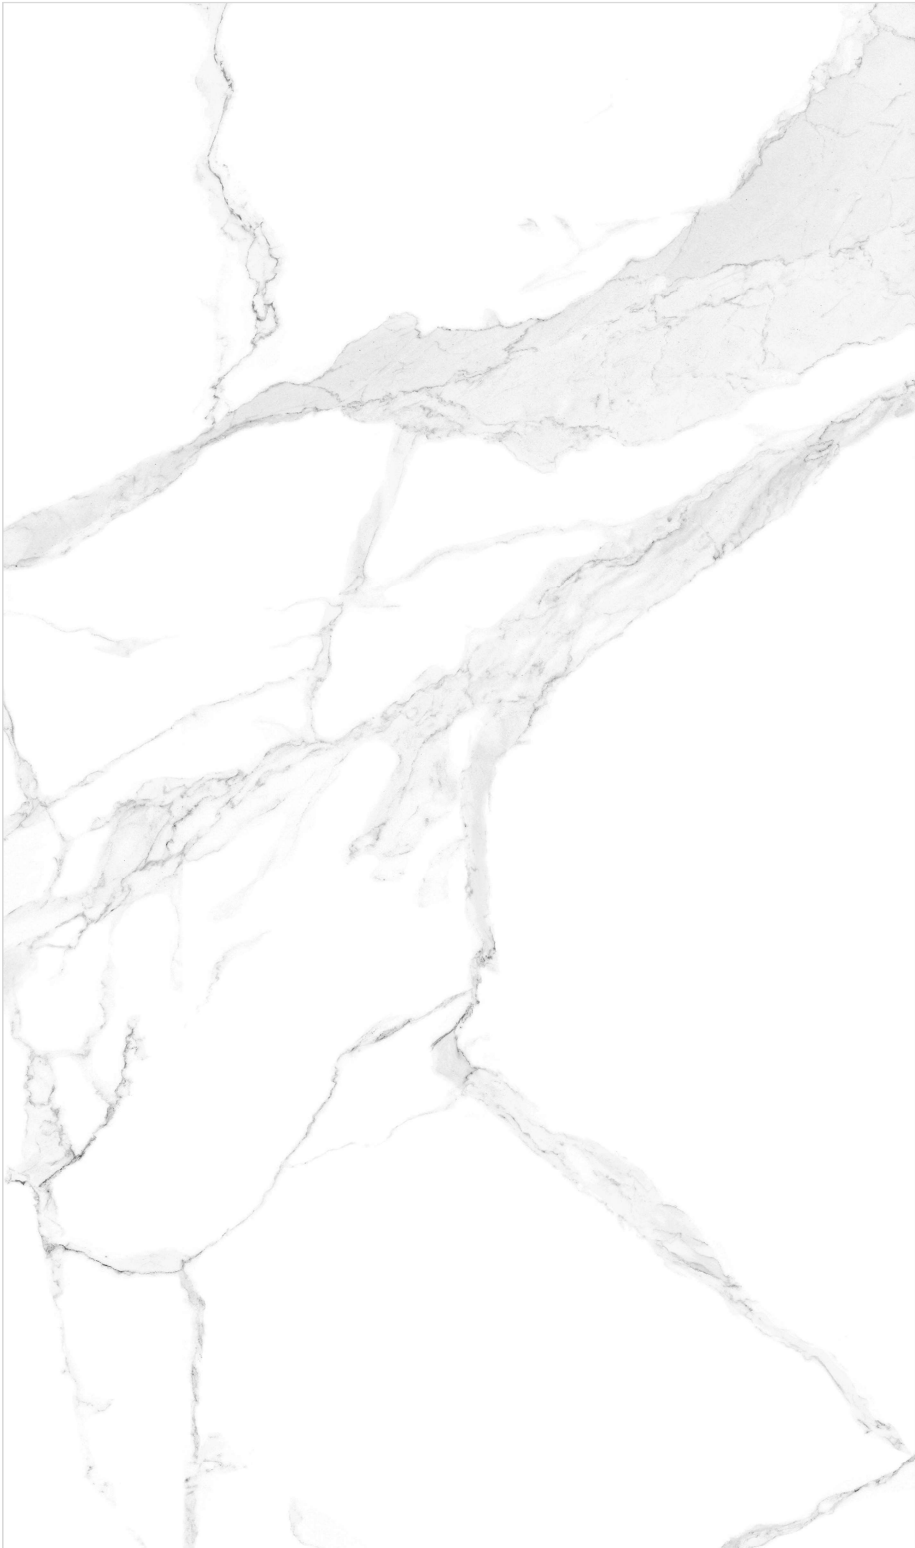

Specifications	12"x24"	24"x24"	24"x48"	32"x64"
Thickness	9.0mm	9.0mm	9.5mm	9.5mm
Width	300mm	600mm	600mm	800mm
Height	600mm	600mm	1200mm	1600mm
Pcs/Box	5	4	2	2
Random Phases	12*	6*	3*	3*



2'X2'



12'X24'



24'X24'



24'X48'



32'X64'

* more phases coming soon



2"x2"



12"x24"




24"x24"



24"x48"



32"x64"

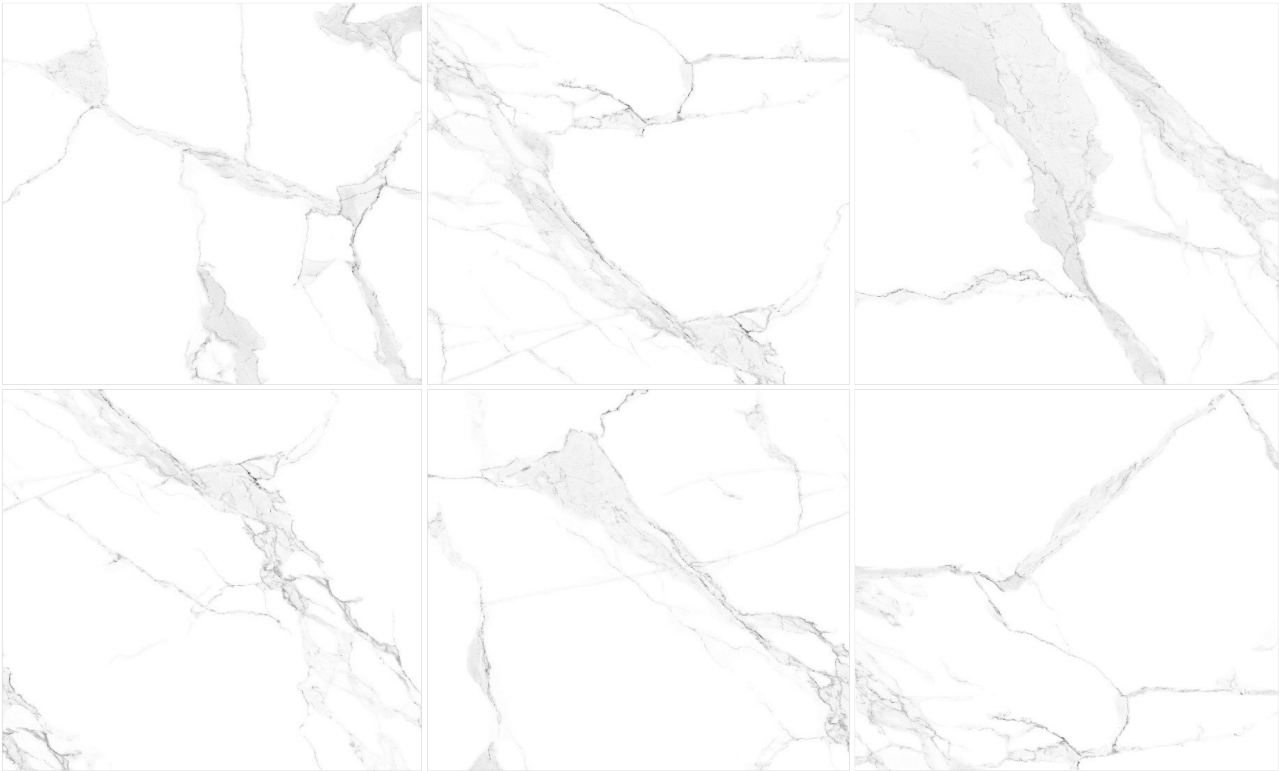

2"x2"



12"x24"




24"x24"



24"x48"



32"x64"

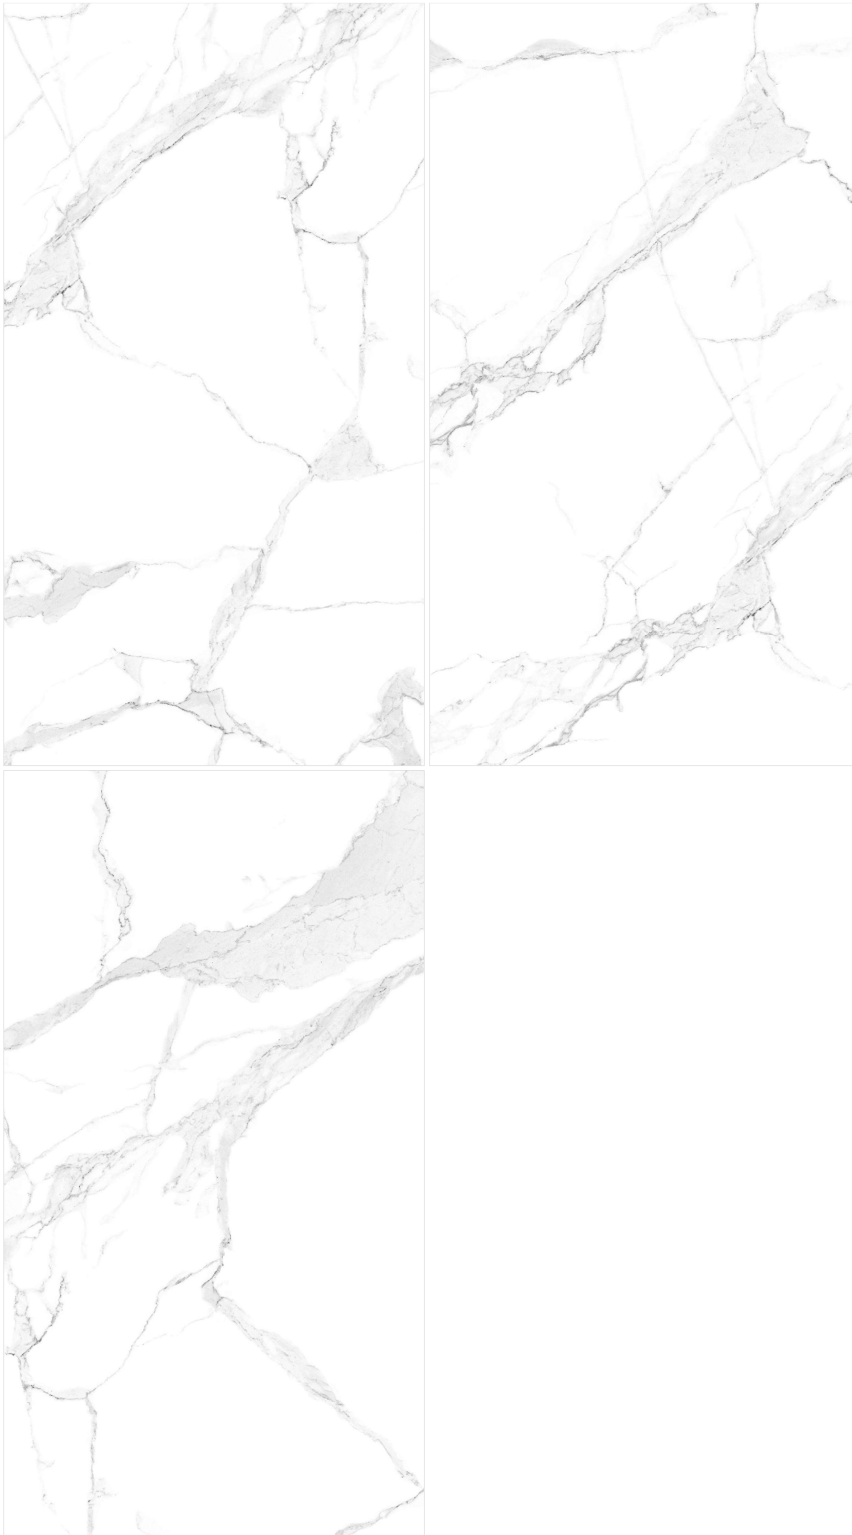

2'x2'



12'x24"




24'x24"



24'x48"



32'x64"

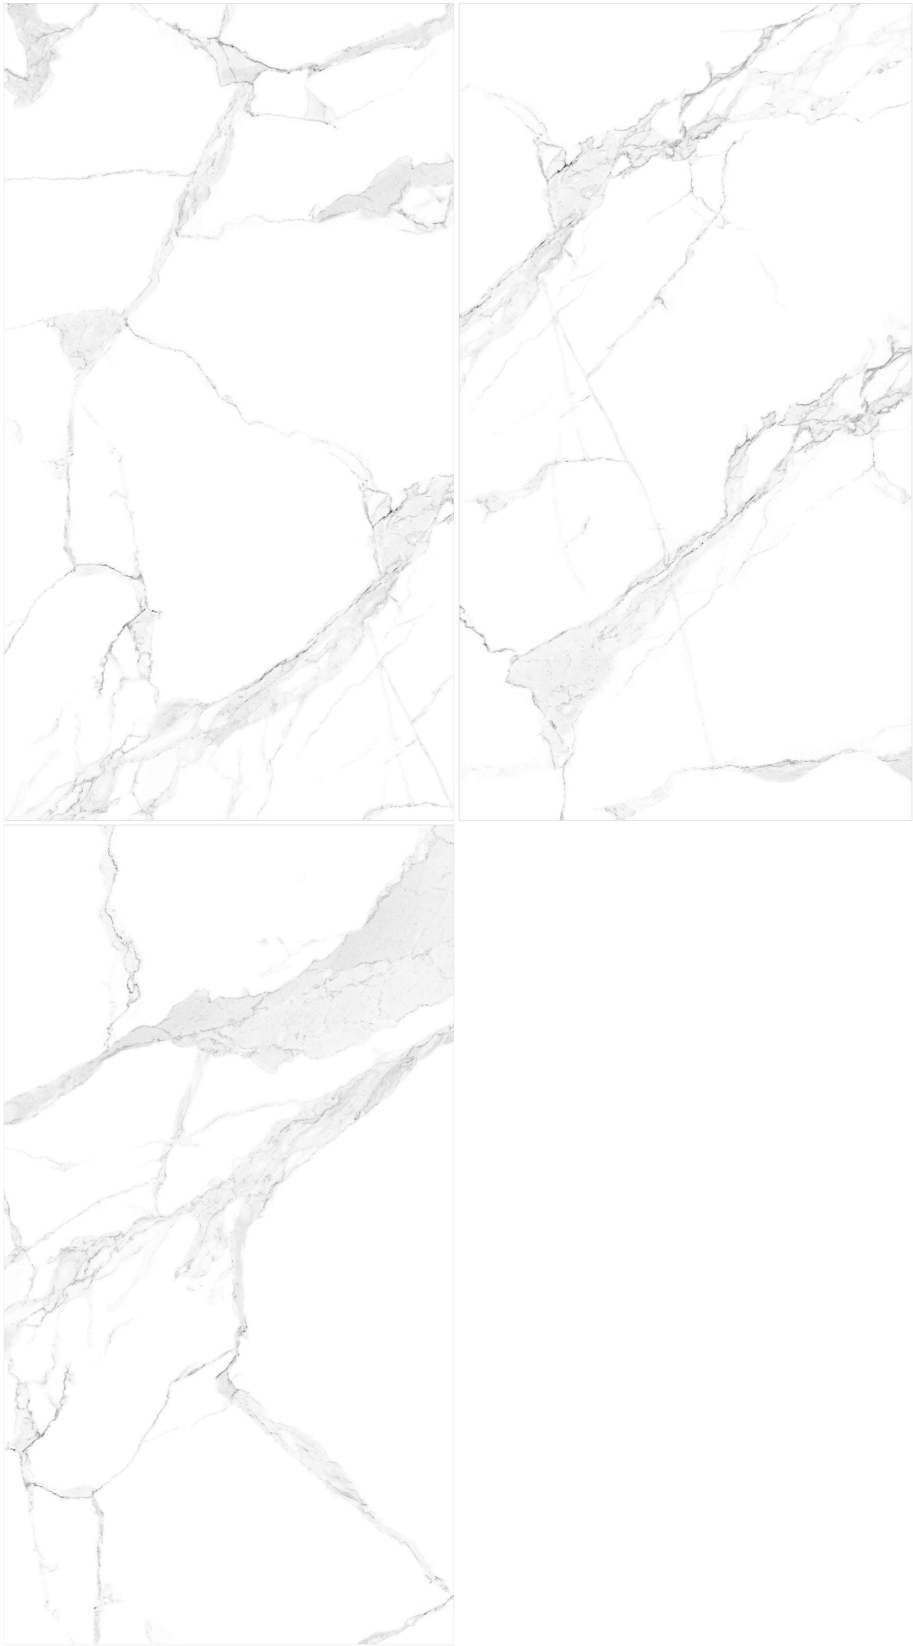

2'x2'



12'x24'



24'x24'



24'x48'



32'x64'

Specifications	12"x24"	24"x24"	24"x48"	32"x64"
Pcs/Box	5	4	2	2
Boxes/Skid	64	40	34	25
Box Weight (lbs/Kg)	40.3/18.3	64.6/29.3	68.1/30.9	121.1/54.9
Skid Weight (lbs/Kg)	2626/1191	2626/1191	2361/1071	3102/1407
Dimensions (LxWxH)	44x36x27	43x36x28	30x38x52	29x64x36

Characteristic	Value	Test Method
Water Absorption	≤0.05%	ISO 10544-3
Apparent Density	>2.28 gm/cc	ISO 51082
Impact Resistance	Min 0.55	ISO 10545-5
Deep Abrasion Resistance	Max 132 mm ³	ISO 10545-6
MoH's Hardness	8	EN101
Chemical Resistance	No Damage	ISO 10545-13
Stain Resistance	Resistant	ISO 10545-14
Slip Resistance (Friction of Co-eff)	>0.40	ISO 10545-17



2"x2"



12"x24"



24"x24"



24"x48"



32"x64"